

Aluminium column SAL MF 7-114

114 mm at the base plate



TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Packing	sleeve material
Diameter at the base plate	114 mm
Finish	brushed anodised aluminium, option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request)
Purpose	masts are designed for hanging flags of surface area up to 6 m ² according to the technical data sheet
Cord	braided spiral, durable, diameter $\varnothing 4$ mm, colour: white
Weight	metal, coated with grey coloured plastic
Plastic mounting band	8 pcs as standard (6 pcs + 1 pc on weight + 1 pc on cross-bar)
Wiring chamber	equipped in cord's lock.
Additional accessories	cross-bar for flag - lengths: 1 m, 1,5 m, 2 m; ending: silver ball end


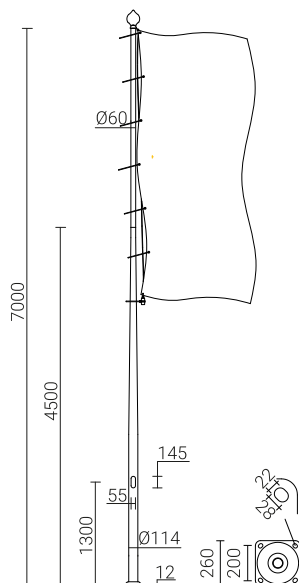


TABLE OF TYPES

Code	Symbol	Height of the column [H]	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42952/C...	SAL MF 7-114	7 m	0.142 m ³	B-51 / Z-51	311151 / 311251	4008	20.7 kg

STRENGTH TABLE

SAL MF 7-114-2	location category			
code 42952	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Surface flag	I zone	I and III zone to 450m AMSL	II zone	III zone to 755m AMSL
≤ 3 m ²	1	1	0	1
≤ 6 m ²	1	1	2	2

ADDITIONAL EQUIPMENT

Name of product	Cross-bar 1,0 m	Cross-bar 1,5 m	Cross-bar 2,0 m
Product code	4000	4003	4011
Outreach of cross-bar [m]	1,0	1,5	2,0
Net weight [kg]	1,8	2,0	2,2
Approximate volume [m ³]	0,01	0,01	0,01

